


SPLINE TOP VIEW




Polyurethane Encapsulation

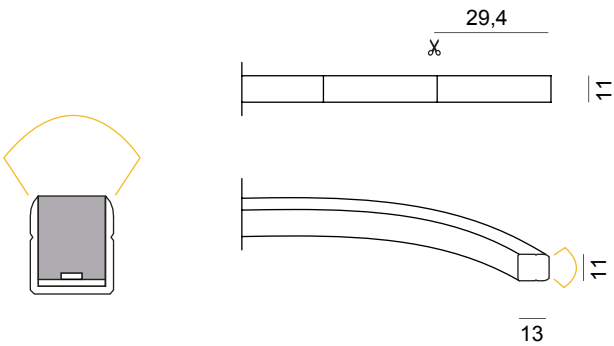

CRI Color Rendering Index:	>94	
Flusso luminoso Luminous flux:	da 840 Lm/m a 1260 Lm/m	
Potenza al metro Power per meter:	14,4 W/m	
Voltaggio Voltage:	24 V	
Resa luminosa Light output:	Luce continua Uniform light	
Lunghezza rolla Roll length:	A richiesta On demand	
Grado protezione Protection:	IP68	
Colori disponibili Colors:	2700 K	.EW
	3000 K	.WW
	3500 K	.LW
	4000 K	.NW
	6000 K	.CW

Possibili posizioni uscita cavo Possible cable out positions

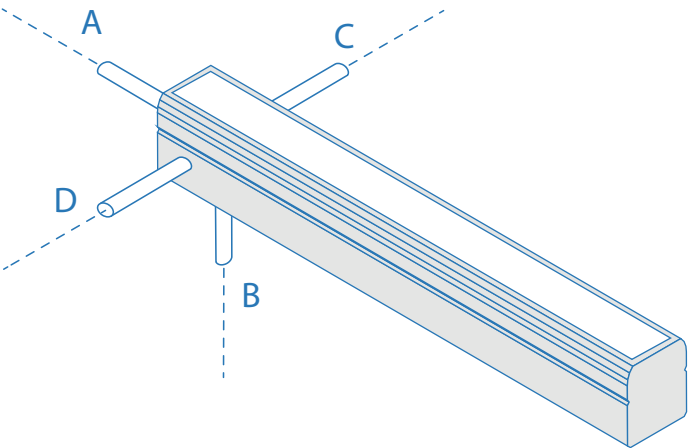


- A Alimentazione frontale (standard) STANDARD front supply
- B Alimentazione posteriore Bottom supply
- C Alimentazione laterale sinistra Left supply
- D Alimentazione laterale destra Right supply

Accessori Accessories:

Kit di montaggio Mounting kit

PRF-01-T Profilo di montaggio in policarbonato anti-UV L=2m UV-resistant polycarbonate mounting profile L= 2m



CMP01059 Kit 5 clip di montaggio in policarbonato anti-UV Kit of nr.5 anti-UV treated polycarbonate mounting clips

Connessioni stagne Watertight connections

CMP01054 Kit connettori 2P maschio/femmina IP68 montaggio su cavo 2-pole male/female IP68 connection kit for cable mounting

CMP01052 Connettore 2P maschio IP68 montaggio su cavo 2-pole male IP68 connector for cable mounting

CMP01053 Connettore 2P femmina IP68 montaggio su cavo 2-pole female IP68 connector for cable mounting

MADE IN ITALY